

Portables line

Icon

Petrol



Icon 100 SH

Icon 100 SK

Charging rate

100 l/min

100 l/min

Filling time¹

20 min

20 min

Engine power

4,3 kW
Petrol HONDA GP 200

4,1 kW
Petrol Kohler SH 265

¹ Filling time 10 l empty cylinder - 0/200 bar (tolerance ±5%)


	Icon 100 SH Petrol HONDA GP 200	Icon 100 SK Petrol Kohler SH 265
Fuel tank capacity	3,1 liter	3,1 liter
Fuel cons. At cont. Rated power	1,7 l/h – 3600 rpm	1,7 l/h – 3600 rpm

Working pressure from 232 to 330 bar

Standard equipment

- 1 1 filling connection to choose between
(1a) DIN 232, (1b) DIN 300, (1c) INT/YOKE 232 bar
- 2 1 filling hose of 1.2 m length

- 3 Frame color Black RAL 9005



Optional

1	Autostop
2	Digital hour meter
3	C-Monitor
4	Remote suction hose kit
5	Pressure maintaining valve
6	Filling connection DRV DIN 232 bar
7	Filling connection DRV DIN 300 bar
8	Filling connection with gauge DRV DIN 232 bar
9	Filling connection with gauge DRV DIN 300 bar

10	DIN/INT adapter
11	Filling connection DRV/INT
12	Filling hose. Available: 2 m - 3 m
Dual output kit 232 bar	
13	Double outlet T fitting for hoses + 2 filling hoses 1,20 m + 2 filling connection DRV DIN 232 bar
Dual output kit 300 bar	
14	Double outlet T fitting for hoses + 2 filling hoses 1,20 m + 2 filling connection DRV DIN 300 bar



Dimensions

Width 78 cm (30.70")

Depth 32 cm (12.59")

Height 35 cm (13.77")


Dry weight

ICON 100 SH

37 kg (81.6 lb)

ICON 100 SK

37 kg (81.6 lb)

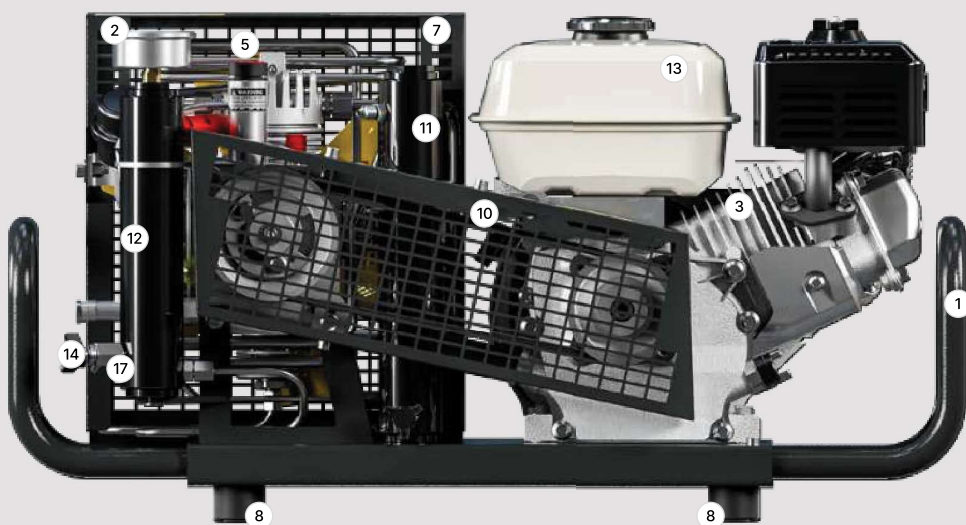

Machine parts

- | | | |
|------------------|--------------------------|---------------------------------|
| 1 Frame | 7 Safety mesh | 13 Fuel tank |
| 2 Pressure gauge | 8 Anti-vibration devices | 14 Combustion engine air filter |
| 3 Engine motor | 9 Cooling fan | 15 Combustion engine muffler |
| 4 Pumping unit | 10 Belt | 16 Safety valve |
| 5 Oil filler cap | 11 Purification system | 17 Condensate discharge |
| 6 Air filter | 12 Condensate separator | |